



LED Flood Light


100W

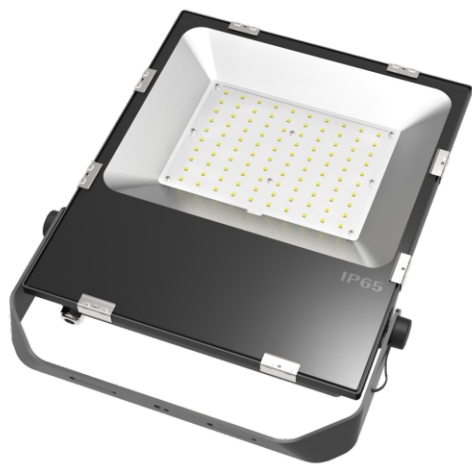

DIMENSIONS

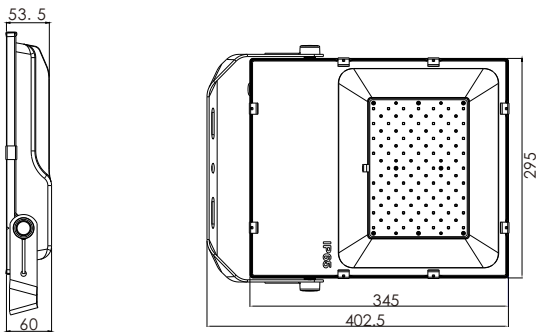

LIGHT DISTRIBUTION CURVE

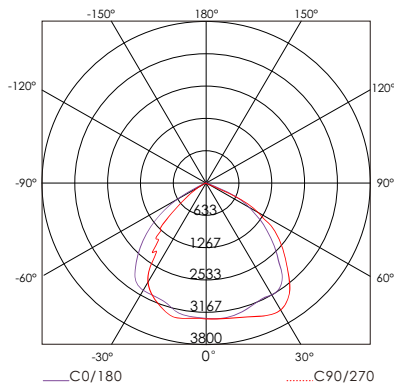

KEY DATA

Power	100W
Luminou Flux	11000lm
Colour Temperature	3000K/4000K/6000K
IP Rating	IP 65
Dimensions	403x295x54mm
Warranty	5 Years Extened

Part Number 3000K

CL-FL-130-100W-04-WW

Part Number 4000K

CL-FL-130-100W-04-NW


Part Number 6500K

CL-FL-130-100W-04-CW


TECHNICAL SPECIFICATIONS

Input Voltage	210-250V AC/100~277V AC
Power Factor	>0.90
Warm white(2700-3000K)	9900lm
Natural white(4000-4500K)	10000lm
Cold white(5800-6500K)	11000lm
LED Manufacturer	NICHIA
LED Type	SMD 3030LED
No. of LEDs	100
Luminous Efficacy	110lm/W
Total Circuit Power(W)	100W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	100°
THD	<0.2
Operating Temp.	-25°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Tempered glass
Housing Material	Aluminium
Mounting	Bracket
Weight	6.0Kg

Application




Square, Plaza



Port



Billboard



Logistic center



Architecture



Production hall