

LED High Bay 200W



KEY DATA

Power	200W
Luminous Flux	30000lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 66
Dimensions	Φ360*188mm
Warranty	5 Years Extended

Part Number 3000K

CL-HB-150-200W-02-WW

Part Number 4000K

CL-HB-150-200W-02-NW


Part Number 6500K

CL-HB-150-200W-02-CW


TECHNICAL SPECIFICATIONS

Input Voltage	90~305V AC
Power Factor	>0.95
Warm white(2700-3000K)	25600lm
Natural white(4000-4500K)	28500lm
Cold white(5800-6500K)	30000lm
LED Manufacturer	OSRAM
Driver Manufacturer	MOSO
Luminous Efficacy	150lm/W
Total Circuit Power(W)	200W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	50°/90°/120°/150°
Dimmable(option)	Dali/0-10V
Operating Temp.	-30°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Poly Carbonate Lens
Housing Material	Aluminium
Mounting	Suspended, Bracket
Weight	7.8kg

DIMENSIONS

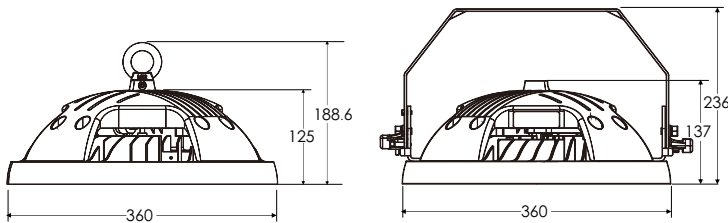

LIGHT DISTRIBUTION CURVE

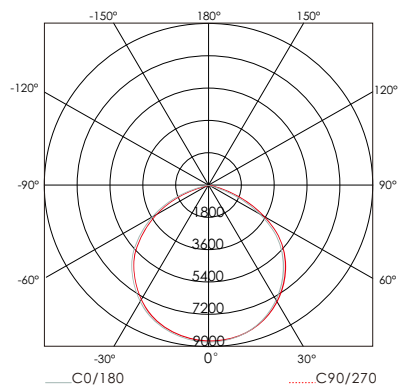

Application




Railway station



Indoor stadium



School



Logistic center



Warehouse



Production hall