



# LED Linear High Bays 150W



## DIMENSIONS

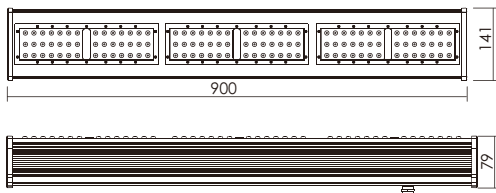

## LIGHT DISTRIBUTION CURVE

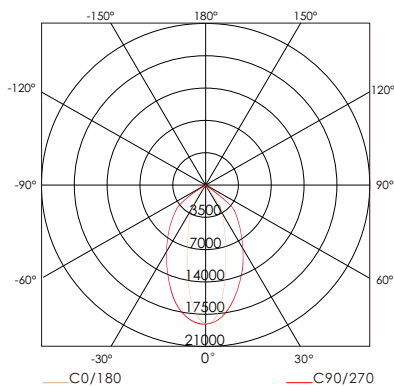

## KEY DATA

Power	150W
Luminous Flux	19000lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 66
Dimensions	900x141x79mm
Warranty	5 Years Extended

Part Number 3000K	CL-LHB-130-150W-WW
Part Number 4000K	CL-LHB-130-150W-NW
Part Number 6500K	CL-LHB-130-150W-CW

## TECHNICAL SPECIFICATIONS

Input Voltage	90~306V AC
Power Factor	>0.95
Warm white(2700-3000K)	16000lm
Natural white(4000-4500K)	17000lm
Cold white(5800-6500K)	19000lm
LED Manufacturer	OSRAM
LED Type	Duris S5 3030LED
No. of LEDs	231
Luminous Efficacy	130lm/W
Driver Manufacturer	Meanwell
Total Circuit Power(W)	150W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	30°/50°/30x70°/140x70°
Dimmable(option)	Dali/0-10V
Operating Temp.	-40°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate Lens
Housing Material	Aluminium
Mounting	Bracket/Suspension
Weight	4.7Kg


## Application




Railway station



Airport




Billboard



Logistic center



Warehouse



Production hall