



# LED Linear High Bays 200W



## DIMENSIONS

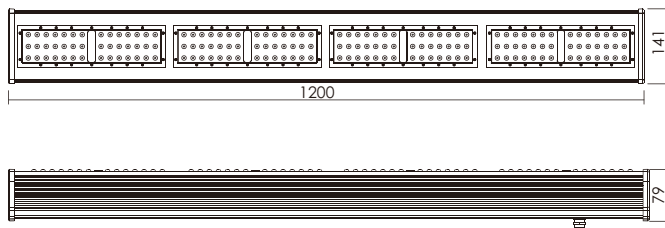

## LIGHT DISTRIBUTION CURVE

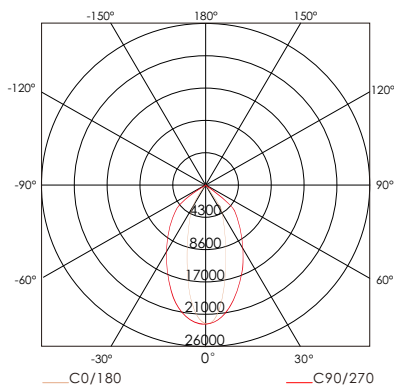

## KEY DATA

Power	200W
Luminous Flux	26000lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 66
Dimensions	1200x141x79mm
Warranty	5 Years Extended

Part Number 3000K

CL-LHB-130-200W-WW

Part Number 4000K

CL-LHB-130-200W-NW

Part Number 6500K

CL-LHB-130-200W-CW

## TECHNICAL SPECIFICATIONS

Input Voltage	90~306V AC
Power Factor	>0.95
Warm white(2700-3000K)	21000lm
Natural white(4000-4500K)	23000lm
Cold white(5800-6500K)	24000lm
LED Manufacturer	OSRAM
LED Type	Duris S5 3030LED
No. of LEDs	308
Luminous Efficacy	120lm/W
Driver Manufacturer	Meanwell
Total Circuit Power(W)	200W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	30°/50°/30x70°/140x70°
Dimmable(option)	Dali/0-10V
Operating Temp.	-40°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate Lens
Housing Material	Aluminium
Mounting	Bracket/Suspension
Weight	6.5Kg


## Application




Railway station



Airport




Billboard



Logistic center



Warehouse



Production hall