



LED Panel Lights


36W 603x603mm(2X2ft)

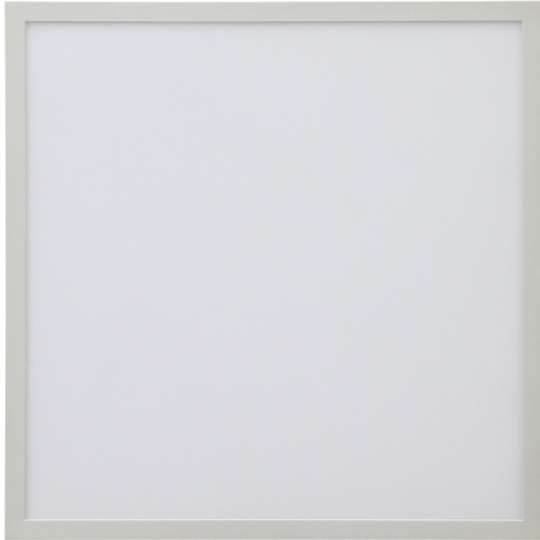

DIMENSIONS

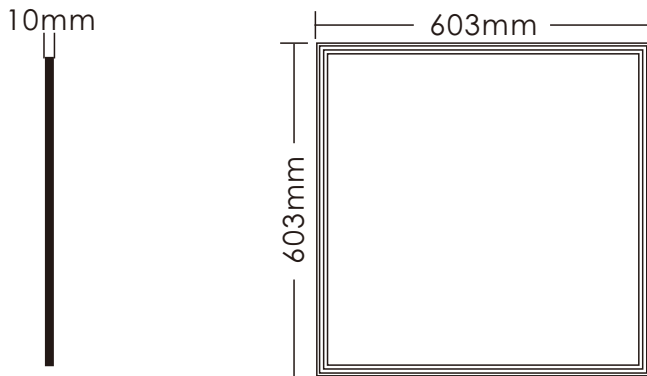

LIGHT DISTRIBUTION CURVE

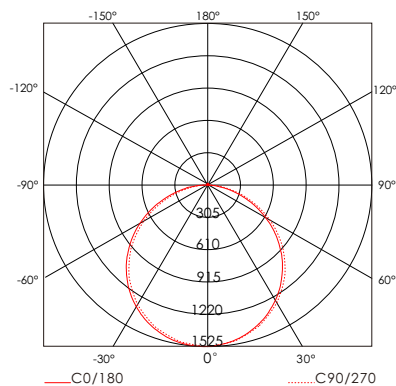

KEY DATA

| | |
|--------------------|--------------------|
| Power | 36W |
| Luminous Flux | 4500lm |
| Colour Temperature | 3000K/4000K/6500K |
| IP Rating | IP 20 |
| Dimensions | 603x603x10mm |
| Warranty | 3/5 Years Extended |

Part Number 3000K

CL-PL-125-US22-36W-WW

Part Number 4000K

CL-PL-125-US22-36W-NW

Part Number 6500K

CL-PL-125-US22-36W-CW

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|----------------------|
| Input Voltage | 100~240Vac |
| Power Factor | >0.9 |
| Warm white(2700-3000K) | 3850lm |
| Natural white(4000-4500K) | 4250lm |
| Cold white(5800-6500K) | 4500lm |
| LED Type | SMD2835 |
| LED brand | EPISTAR/LEXTAR |
| Luminous Efficacy | 125lm/W |
| Driver Output Voltage DC | 36-42V DC |
| Total Circuit Power(W) | 36W+/-5% |
| Electrical Class | II |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 120° |
| Dimmable(option) | Dali/0-10V/PWM/Traic |
| Operating Temp. | -20°C to +50°C |
| Lifespan | 80,000 Hours |
| Flickering free(option) | Available |
| Light Guide Plate | PMMA |
| Housing Material | Aluminium |
| UGR<19(option) | Available |
| Weight | 4.8Kg |

Application



Office



School



Shopping mall



Hospital



Library



Conference room