



# LED Flood /Tunnel Light 500W



## DIMENSIONS

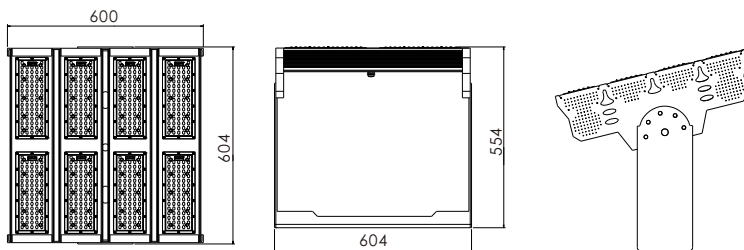

## LIGHT DISTRIBUTION CURVE

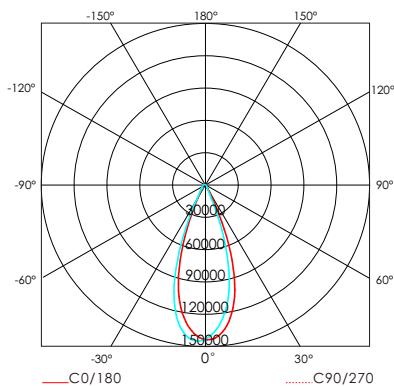

## KEY DATA

Power	500W
Luminou Flux	62000lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 65
Dimensions	600x596x221mm
Warranty	5 Years Extened

Part Number 3000K

**CL-TF-125-500W-01-WW**

Part Number 4000K

**CL-TF-125-500W-01-NW**

Part Number 6500K

**CL-TF-125-500W-01-CW**

## TECHNICAL SPECIFICATIONS

Input Voltage	90~306V AC
Power Factor	>0.95
Warm white(2700-3000K)	53000lm
Natural white(4000-4500K)	58900lm
Cold white(5800-6500K)	62000lm
LED Manufacturer	PHILIPS
LED Type	SMD3030
No. of LEDs	616
Luminous Efficacy	125lm/W
Driver Manufacturer	Meanwell/MOSO
Total Circuit Power(W)	500W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	40°, 80°, 120°, 30°*70°
Dimmable(option)	Dali/0-10V
Operating Temp.	-40°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate Lens
Housing Material	Aluminium
Mounting	Ceiling Mounted/Wall mounted
Weight	28Kg

## Application




Tunnel




Square/Plaza



Architecture



Logistic center



Port



Stadium