


LED Troffer Light


31W



DIMENSIONS

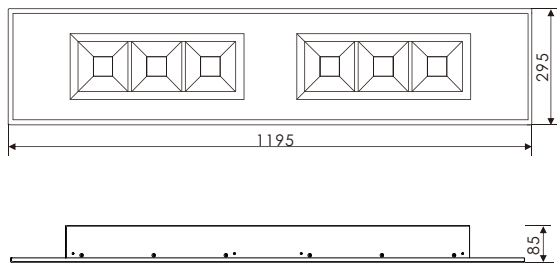

LIGHT DISTRIBUTION CURVE

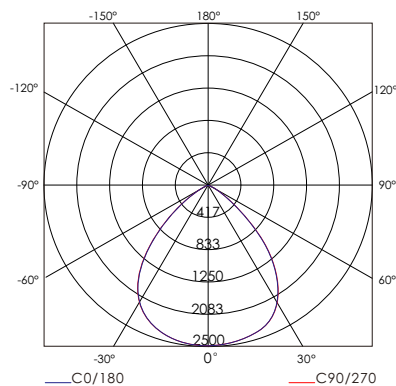

KEY DATA

Power	31W
Luminous Flux	3565lm
Colour Temperature	3000K/4000K/5000K
IP Rating	IP 20
Dimensions	1195x295x85mm
Warranty	5 Years Extended

Part Number 3000K

CL-TO-115-31W-14-02-WW

Part Number 4000K

CL-TO-115-31W-14-02-NW

Part Number 5000K

CL-TO-115-31W-14-02-PW

TECHNICAL SPECIFICATIONS

Input Voltage	200~240V AC
Power Factor	>0.90
Warm white(2700-3000K)	3048lm
Natural white(4000-4500K)	3386lm
Cold white(5000-5500K)	3565lm
LED Manufacturer	OSRAM
LED Type	SMD2835
No. of LEDs	108
Luminous Efficacy	115lm/W
Driver Manufacturer	LIFUD
Total Circuit Power(W)	31W+/-5%
Electrical Class	II
Colour Rendering	>80 Ra
Lamp Viewing Angle	86°
UGR	<19
Operating Temp.	-45°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polystyrene
Housing Material	IRON
Mounting	Suspended, Recessed
Weight	5.0Kg

Application



Office



School



Shopping mall



Hospital



Library



Conference room