


LED Tri-proof Batten proline 60W 1500mm (5ft)



DIMENSIONS



LIGHT DISTRIBUTION CURVE

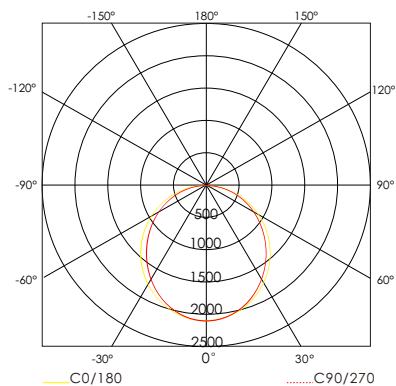

KEY DATA

Power	60W
Luminou Flux	7600lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 65
Dimensions	1500x115x62mm
Warranty	5 Years Extended

Part Number 3000K	CL-TP-BN150-135-60W-WW
Part Number 4000K	CL-TP-BN150-135-60W-NW
Part Number 6500K	CL-TP-BN150-135-60W-CW

TECHNICAL SPECIFICATIONS

Input Voltage	100~240Vac
Power Factor	>0.9
Warm white(2700-3000K)	6500lm
Natural white(4000-4500K)	7200lm
Cold white(5800-6500K)	7600lm
LED Manufacturer	Epistar
LED Type	SMD2835
No. of LEDs	300
Luminous Efficacy	127lm/W
Driver Manufacturer	Lifud/AGT
Total Circuit Power(W)	60W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable(option)	Dali/0-10V/PWM
Operating Temp.	-25°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate
Housing Material	Aluminium
Flickering free	Yes
Weight	3.2Kg

Application




Metro station




Airport



Indoor Carpark



Natatorium



Warehouse



Production hall