


# LED Tri-proof Batten proline 28W 600mm(2ft)



## DIMENSIONS



## LIGHT DISTRIBUTION CURVE

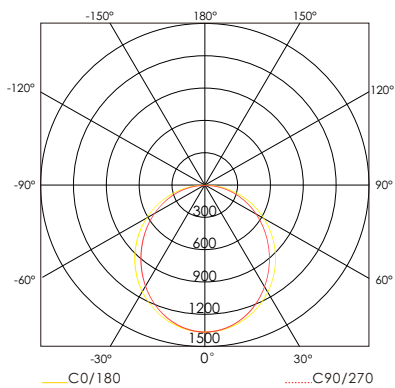

## KEY DATA

Power	28W
Luminou Flux	3800m
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 65
Dimensions	600x115x62mm
Warranty	5 Years Extended

Part Number 3000K

**CL-TP-BN60-135-28W-WW**

Part Number 4000K

**CL-TP-BN60-135-28W-NW**

Part Number 6500K

**CL-TP-BN60-135-28W-CW**

## TECHNICAL SPECIFICATIONS

Input Voltage	100~240Vac
Power Factor	>0.9
Warm white(2700-3000K)	3300lm
Natural white(4000-4500K)	3600lm
Cold white(5800-6500K)	3800lm
LED Manufacturer	Epistar
LED Type	SMD2835
No. of LEDs	144
Luminous Efficacy	136lm/W
Driver Manufacturer	Lifud/AGT
Total Circuit Power(W)	28W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable(option)	Dali/0-10V/PWM
Operating Temp.	-25°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate
Housing Material	Aluminium
Flickering free	Yes
Weight	1.2Kg

## Application



Metro station




Airport




Indoor Carpark



Natorium



Warehouse



Production hall