



Morley 120cm LED Tri-proof Batten Proline



DIMENSIONS

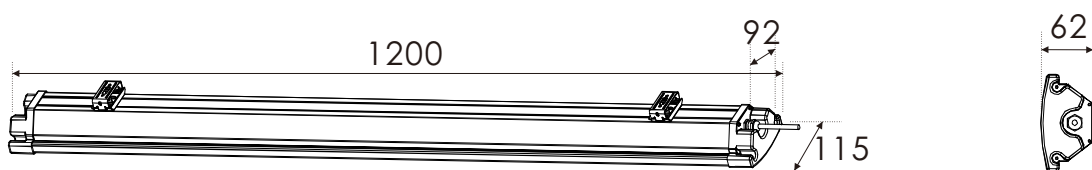

LIGHT DISTRIBUTION CURVE

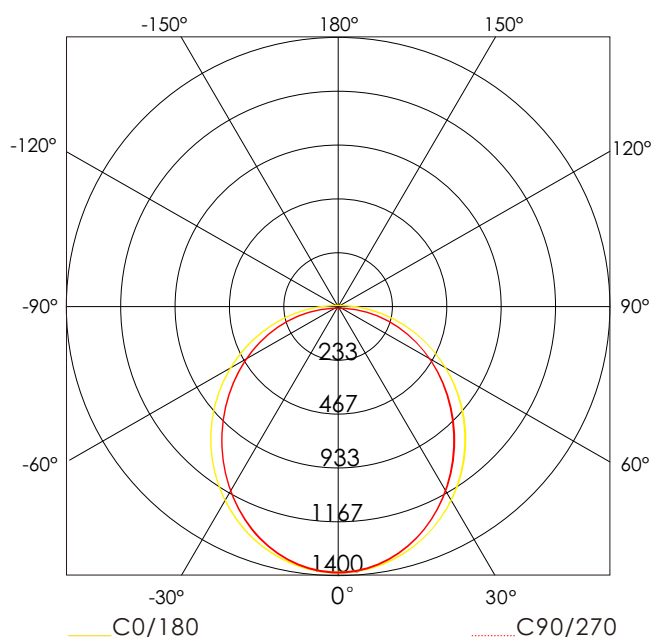

KEY DATA

Power	45W
Luminous Flux	4611lm
Colour Temperature	3000K/4000K/6500K
IP Rating	IP 65
Dimensions	1200x115x62mm
Warranty	5 Years Extended

Part Number 3000K

CL-TR8-BN120-45W-WW

Part Number 4000K

CL-TR8-BN120-45W-NW

Part Number 6500K

CL-TR8-BN120-45W-CW

TECHNICAL SPECIFICATIONS

Input Voltage	200~240V AC/90~306V AC
Power Factor	>0.95
Warm white(2700-3000K)	4419lm
Natural white(4000-4500K)	4517lm
Cold white(5800-6500K)	4611lm
LED Manufacturer	Epistar
LED Type	SMD2835
No. of LEDs	240
Luminous Efficacy	102lm/W
Driver Manufacturer	Lifud/Meanwell
Total Circuit Power(W)	45W+/-5%
Electrical Class	II
Colour Rendering	>80 CRI
Lamp Viewing Angle	120°
Dimmable	Dali/0-10V
Operating Temp.	-25°C to +50°C
Lifespan	55,000 Hours
Diffuser Material	Polycarbonate Cover
Housing Material	Aluminium
Weight	3.1Kg

FEATURES & BENEFITS

- Superior SMD2835 LED Chips
 - Robust weather and dust-proof IP65-rated housing
 - 0-10V / DALI dimming
 - Stainless steel retaining fixtures
 - Emergency and occupancy sensing
- Version are available