

LED PANEL LAMP USER MANUAL



IP20

LED



Storage Info

Environmental Operating	-10°C to +40°C
Environmental Rating	Dry or damp location rated
Environmental Storage	-40° C to +60° C



BEFORE YOU BEGIN

Read these instructions completely and carefully.

⚠ WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal.
- Properly ground electrical enclosure.

RISK OF FIRE

- Follow all NEC and local codes.
- Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75mm²).

Prepare Electrical Wiring

Refer to PL Series LED Panel Specification for more lamp electrical data info.



Electrical Requirements

- The LED luminaire must be connected to the mains supply according to its ratings on the product label.






Grounding Instructions

- The grounding and bonding of the overall system shall be done in accordance to local electric code of the country where the luminaire is installed.


► RECESSED IN A CUT-OUT HOLE

Accessories	3030	3060	6060	6262	30120	60120
		X 4			X 6	

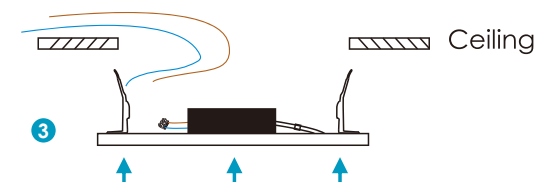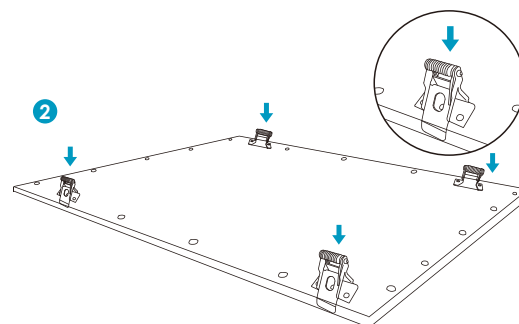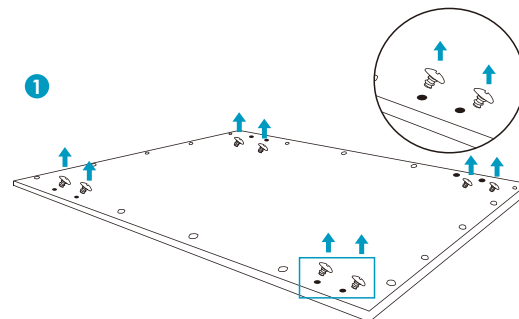


Cut-Out:

3030: 280X280mm	6060: 580X580mm
3060: 280X580mm	6262: 600X600mm
30120: 280X1180mm	60120: 580X1180mm

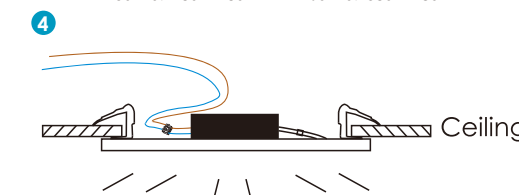


► RECESSED IN FALSE-CEILING FRAME

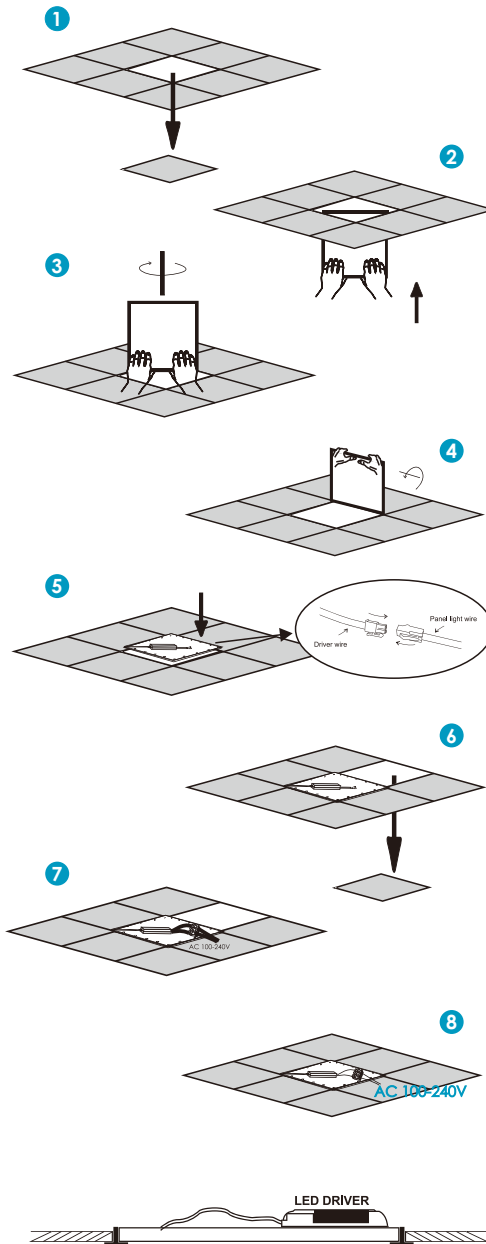

► SUSPENSION

Accessories	3030	3060	6060	6262	30120	60120
		X 2			X 3	
		X 2			X 3	
		X 4			X 6	
wire A		X 2			X 3	
wire B		X 2			X 3	

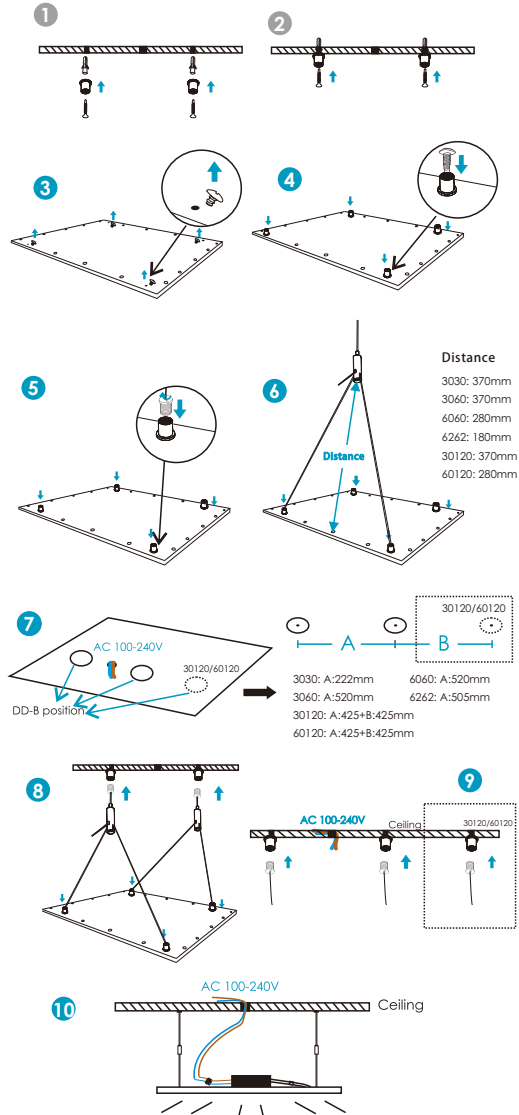

Distance

3030: 370mm

3060: 370mm

6060: 280mm

6262: 180mm

30120: 370mm

60120: 280mm

30120/60120

3030: A:222mm

3060: A:520mm

30120: A:425+B:425mm


6060: A:520mm

6262: A:505mm


60120: A:425+B:425mm

► CEILING & WALL MOUNTED


Accessories	3030	3060	6060	6262	30120	60120
bracket A		X 4			X 6	
bracket B		X 4			X 6	
		X 4			X 6	
		X 4			X 6	
		X 4			X 6	

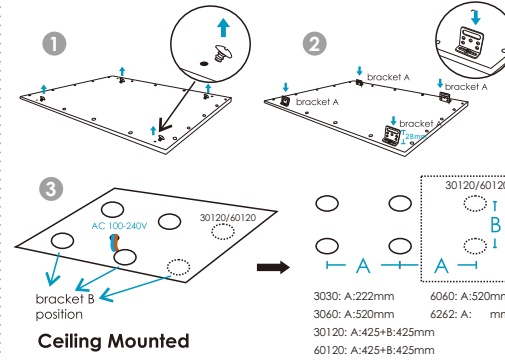

Ceiling Mounted

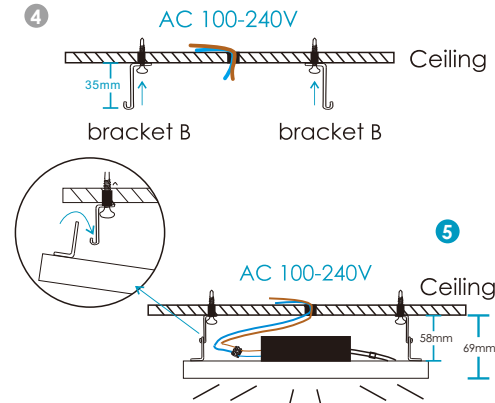

Wall Mounted

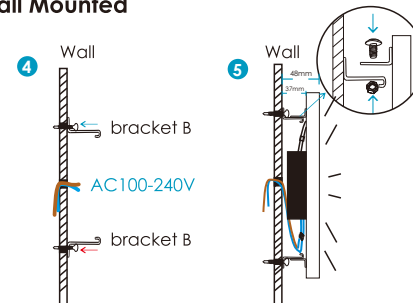

► FRAME MOUNTED

Accessories	3030	3060	6060	6262	30120	60120
Frame A		X 2			X 2	
Frame B		X 2			X 2	
		X 8			X 8	
		X 4			X 6	

